


Moving Head BSW Series

400W LED Moving Head Beam+Spot+Wash

300W LED Moving Head Beam+Spot+Wash



Product size

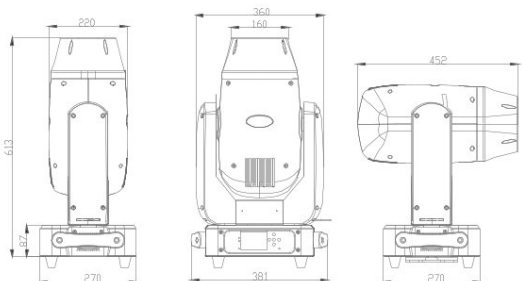

Lux

38°Lux:	3136	1500	920	490	300
3° Lux:	94900	41500	25800	11500	6680

Distance(m):	0	5	8	10	15	20
3° Diameter(cm):	0	28	42	54	81	108
38° Diameter(cm):	0	180	270	370	550	740

YR-400CMY YR-300CMY

Working parameters

Voltage: 100V- 240V 50/60HZ
 Power: 400CMY:550W 300CMY:480W

Light source parameters

Light source: 400CMY: LED400W 300CMY: LED 300W
 Color temperature: 6800K (using CTO: 5700K--3500K)

Effect parameters

Color wheel : 7 colors+white + strobe and water Bowing effects
 CMY: 1 PCS C wheel +1 PCS M wheel +1 PCS Y wheel.they can be overlapped to get a color mixing effect
 CTO: 1 piece CTO GLASS with adjustable color temperature: 5700K--3500K
 Gobo wheel: 1 metal gobo wheel: 11 gobos + white, with shaking, Bowing effect
 1 glass gobo wheel: 7 gobos + white, with shaking, Bowing effect
 Prism: 1piece 8-facet prism+1piece 5-facet prism,independent rotation
 Beam angle: 3°--38°
 Atomization: 1 piece atomizing glass
 Strobe: 1-30Hz
 Scan: Pan 540° 2.6S/cycle, tilt:270° 1.3S/cycle, three-phase motor, double-precision reset with photoelectric reset and Hall correction, making the positioning more accurate, and at the same time, it can automatically correct errors and has an automatic return function.

Control parameters

Control mode: DMX512\Manual\Master&Slave
 Control channel: 23CH
 Control signal: DMX512 (Digital MultipleX 512) + RDM, in line with international standard lighting control transmission Protocol, support console setting address code, support DMX interface upgrading software
 Display screen: Touch screen, the screen can be reversed, switch in both Chinese and English, automatic screen off/lasting bright screen, record light source time, fault inspection, the software version information, restore factory Settings.

Security parameters

Working environment: 40 degrees
 Security protection: automatically cut off the power when the Pxture is overheating or with system error.
 IP Rate: IP20

Packaging parameters

Product size: 37.5*27*64.5CM
 Net weight: 22.5 KG
 Packing size: 52*51*64CM
 Gross weight: 26