




Application: Indoor; Outdoor;

Installation Type: Fixed; Rental;

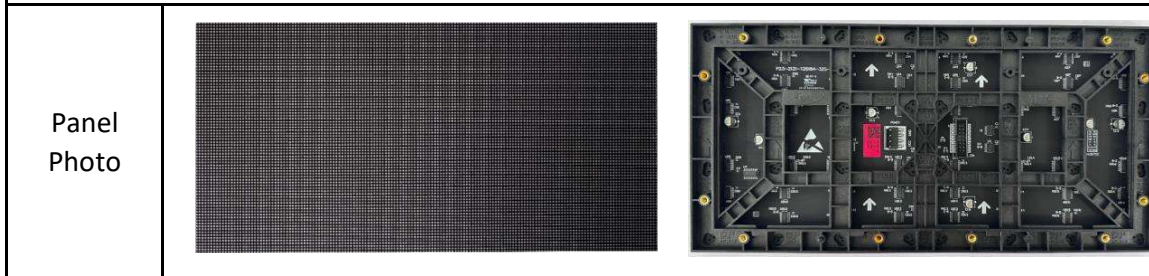

KCII Series Module Specifications

Version: V20230523

	Parameter	KCII1.2	KCII1.5	KCII1.8	KCII2	KCII2.5	Unit	
Module	Pixel Pitch	1.25	1.538	1.86	2.00	2.50	mm	
	LED Type	SMD1010	SMD1212	SMD1515	SMD1515	SMD2121	/	
	Module Size(WxH)	320x160						mm
	Pixel Per Module	256x128	208x104	172x86	160x80	128x64	Dots	
	Module Weight	0.55						Kg
	Brightness	500						nit
	Refresh rate	3840						Hz
	Color Temperature	2000~9300						K
	Viewing angle(H)	160±10						deg.
	Viewing angle(V)	160±10						deg.
	Drive type	1/64	1/52	1/43	1/40	1/32	/	
Application	AC Operating Voltage	200~240						V
	AC Input Frequency	50~60						Hz
	Power Consumption (Max.)	25	25	25	25	25	W/ pcs	
	Storage Temperature	- 20~ + 40						°C
	Operating Temperature	- 10~ + 40						°C
	Storage Humidity	10%~65%						RH
	Operating Humidity	10%~65%						RH
	Module Maintenance	Front Maintenance						/
	Panel Installation Type	Front Install						/

Remark: Power consumption tolerance: ±15%, according to the actual situation.
 Ledman Optoelectronic Co., Ltd. reserves the right to modify specifications and parameters without further notice.
 Ledman Optoelectronic Co., Ltd. reserves the final interpretation right of this document.